

## **GROUNDED IN RESEARCH,** COMMITTED TO TREATMENT, **FOCUSED ON RESULTS** At MagVenture, we're passionate about groundbreaking technology that helps improve VISION people's lives. That's why we've been pioneering non-invasive Transcranial Magnetic Stimulation (TMS) technology for more than 30 years. To offer new hope to patients by transforming Since the earliest days of TMS, we've worked with how mental health and physical thousands of researchers to expand their conditions are treated knowledge of the human brain and collaborated with leading neuroscientists to advance technology in psychiatry, neurophysiology, neurology, cognitive neuroscience and rehabilitation. After many years grounded in the TMS field, we applied our expertise from research and diagnostics to developing clinical TMS and lately MISSION Magnetic Peripheral Nerve Stimulation (mPNS) solutions that push the adaptation of clinical applications. To pioneer safe, effective, and reliable magnetic stimulation MagVenture is proud to be a privately-owned therapies, offer innovative and Danish company. Our products are designed, versatile research solutions and developed, produced, and quality-tested in work to expand access to magnetic Denmark to the highest standards. With subsidiaries in the USA, Brazil, the UK, China, and stimulation worldwide Germany, as well as a distribution network in more than 60 countries, our reach is truly global. This catalog showcases our full range\* of products that can provide complete system solutions for your neuromodulation needs. With our range of flexible, modular products, you can configure the TMS system that meets your specific requirements, and you can add accessories and even upgrade your system as your needs change. We're here to support you in choosing the TMS system and accessories that best suit your needs, so please speak to us about how we can help.

me products may not be available in your region due to licensing provals and regulations. Please consult your local MagVenture presentative for guidance.

#### **MORE THAN 30 YEARS OF TMS INNOVATION**

From the first MagPro stimulator for brain stimulation research to supplying a wide range of devices for use in the treatment of psychiatric disorders, MagVenture has been a pioneer in TMS technology for more than 30 years.

> MagVenture launches a complete TMS research system, including a coil for double-blind placebo-controlled trials.



The first subsidiary, MagVenture Inc. is established in the US.



A new coil, the Cool-40 specifically for animal model research.



Rat Coil, is developed



The third subsidiary, MagVenture Ltd. is established in the UK.



MagVenture introduces

the **Flow Arm**, which makes

coil positioning easier and

reduces strain on the operator.

In Europe, MagVenture is the first TMS provider to receive approval for TMS treatment for addiction.



MagVenture Medical Technology (Shanghai) is established in China

More than **190** dedicated employees working on delivering TMS to the world.



anniversary

The fourth subsidiary, MagVenture Ltda. is established in Brazil.

1992

2010

2011

MagVenture introduces the Static Cool concept, allowing TMS researchers to run protocols without changing coils during sessions.

2004

MagVenture's MRI-B91

coil makes it possible

inside an MRI scanner.

2001

to perform **rTMS** 

2017

2018

2019

2020

2021

2022

2023

2013

2014

MagVenture is the first TMS provider to introduce a **three-minute** 

theta burst protocol that significantly decreases the length of TMS treatments.



MagVenture is now

represented in 60+ countries through local distributors. TMS systems now installed in more than 90 countries.



MagVenture introduces **Atlas™ Neuro** Navigation System for precise, individualized coil positioning





MagVenture receives the **clearance for Pain treatment** in the US

The first **MagPro stimulator** is launched

MagVenture.

by Tonica Elektronik A/S

which later becomes

The second subsidiary, MagVenture GmbH is **established in** Germany.

MagVenture introduces the Dynamic Cool concept,

allowing TMS researchers to perform consecutive rTMS treatments without coil changes.



MagVenture is the first TMS provider to receive approval for its depression treatment system in Europe.









#### **MagPro Compact**

The MagPro Compact is intended as an electro-physiological aid to assess and monitor the central and peripheral nervous systems, based on the use of motor evoked potential (MEP). It is designed to be used in combination with electromyographic (EMG) equipment. The power control and trigger button are integrated into the coil handle making it simple and effective to operate.



Part no.	Max repetition rate	Pulse mode	Waveform	Current direction	Ramp up
9016E0852	5 pps	Standard	Biphasic	Normal	No

#### MagPro R20

The MagPro R20 is a magnetic stimulator intended as an electro-physiological aid to assess and monitor the central and peripheral nervous systems. A diagnostic tool to measure motor evoked potential (MEP) in clinical examinations and for therapeutic use. It can be applied for treatment with standard 10 Hz or 15 Hz protocols. The device is compatible with a wider range of coils than the MagPro Compact and is ideal for clinics running a limited number of TMS sessions per day. Quick and easy to set up.



Part no.	Max repetition rate	Pulse mode	Waveform	Current direction	Ramp up
9016E0861	20 pps	Standard	Biphasic	Normal	No

#### MagPro R20+

The MagPro R20+ is a high-performance compact magnetic stimulator intended for therapeutic purposes. It can be used as a diagnostic tool to measure motor evoked potential (MEP) in clinical examinations and for therapeutic use with standard 10 Hz or 15 Hz protocols. Because of its increased energy efficiency due to shorter pulse widths, MagPro R20+ can run more TMS sessions per day than the MagPro R20 and is able to stimulate at higher frequency rates – up to 100 Hz.



Part no.	Max repetition rate	Pulse mode	Waveform	Current direction	Ramp up
9016E0881	100 pps	Standard	Biphasic	Normal	No

#### MagPro R20+ Express

It is possible to add a theta burst solution and a wifi package to the MagPro R20+ stimulator, called the MagPro R20+ Express. The MagPro R20+ Express includes a Wi-Fi package and theta burst capabilities. The Wi-Fi package enables protocol set-up via a computer. This system can run 3-minute therapy, currently the fastest TMS therapy available, known as "theta burst" or Express TMS.



\* The MagPro R20 cannot be upgraded with Theta Burst functionality.

Part no.	Max repetition rate	Pulse mode	Waveform	Current direction	Ramp up
9016E0911	100 pps	Standard	Biphasic Biphasic Burst (Theta Burst)	Normal	No

#### MagPro R30

The MagPro R30 is a high-performance TMS magnetic stimulator primarily for clinical use as well as research. A diagnostic tool to measure motor evoked potential (MEP) and for therapeutic treatment. It performs repetitive transcranial magnetic stimulation and can run many complex protocols successively; up to 20,000 pulses in one session. The theta burst option can be added to run theta burst stimulation; 60 pps and 80 pps options can also be added. Allows for storage of multiple stimulator setups, external control, and heat tolerance when performing intense, focused, and repeated protocols.



Part no.	Max repetition rate	Pulse mode	Waveform	Current direction	Ramp up
9016E0721	30 pps, 60 pps, 80 pps	Standard	Biphasic, Biphasic Burst	Normal	Yes
			(Theta Burst)		

#### MagPro R30 inclusive MagOption

The MagPro R30 with MagOption can provide both biphasic and monophasic pulse waveforms, paired-pulses or twin-pulses, complex pulse firing patterns, and high frequency stimulation up to 30 Hz. With the same features as the MagPro R30 but with enhanced stimulation capabilities, it provides monophasic waveform and twin and dual pulses up to 5 pps (both monophasic and biphasic). Allows for storage of multiple stimulator setups, external control, and heat tolerance when preforming intense, focused, and repeated protocols. It has the same features as the R30 with additional advanced diagnostic capabilities.



Part no.	Max repetition rate	Pulse mode	Waveform	Current direction	Ramp up
9016E0741	30 pps	Standard, Dual, Twin	Biphasic, Monophasic	Normal	Yes

MagPro® Stimulators

#### MagPro X100

The MagPro X100 is a high performance magnetic stimulator designed primarily for research. It can provide both biphasic and monophasic pulse waveforms, electronically reverse current direction, complex pulse firing patterns, and high frequency stimulation up to 100 Hz. The device allows for storage of multiple stimulator setups, external control, and heat tolerance when performing intense, focused, and repeated protocols. Supports all clinical protocols, research, and diagnostic usage.



Part no.	Max repetition rate	Pulse mode	Waveform	Current direction	Ramp up
9016E0711	100 pps 250 pps	Standard	Biphasic, Monophasic, Biphasic Burst (Theta Burst)	Normal, Reverse	Yes

### MagPro X100 inclusive MagOption


A high performance magnetic stimulator primarily for research. The MagPro X100 with MagOption offers a wide range of stimulation parameters, theta burst and stimulation rates up to 100 Hz, and the possibility to combine waveforms and pulse modes. With the same features as the MagPro X100, it also provides half-sine waveforms, twin and dual pulses up to 50 pps (biphasic) and has a power mode with a 40% increase in intensity and pulse width.



Part no.	Max repetition rate	Pulse mode	Waveform	Current direction	Ramp up
9016E0731	100 pps 250 pps	Standard, Dual, Twin, Power	Biphasic, Monophasic, Biphasic Burst (Theta Burst), Half-sine	Normal, Reverse	Yes

#### Isolation Transformer

MagVenture's isolation transformer for MagPro R20, R20+, R30 and X100 devices. The Isolation Transformer reduces leakage current and is able to distribute power for stimulators and auxiliary devices such as the coil cooler unit, treatment chair and vacuum pump.



Part no.

9016D0041

100 V	120 V	200 V		
Part no.	Part no.	Part no.		
9016D0051	9016D0031	9016D0071		

MagPro XP Orange Edition

The MagPro XP Orange Edition has the same single pulse power as the R30 and X100 but is able to maintain high frequency, high intensity stimulation without power decline and can deliver up to 250 Hz. The first stimulator to bridge the gap between electrophysiological memory models and TMS, using the same frequency as the human brain. With fully integrated, cooling, it can run the most demanding, focused stimulations without coil overheating. It comes as a fully encased, integrated system with a practical console design that makes it easy to transport. Optimized for interleaved TMS/fMRI research.

The MagPro XP Orange Edition is a research tool only, developed for advanced brain research. It does require a special license.

300 us, 100 V	300 us, 120 V	300 us, 230 V
Part no.	Part no.	Part no.
9016A0501	9016A0511	9016A0521
200 us 100 V	200 us 120 V	200 us 230 V
200 us, 100 V	200 us, 120 V	200 us, 230 V
200 us, 100 V Part no.	200 us, 120 V Part no.	200 us, 230 V Part no.

Max repetition rate	Pulse mode	Waveform	Current direction	Ramp up
250 pps	Standard	Biphasic,	Normal	No
		Biphasic Burst (Theta Burst)		

MagPro® Stimulators

15

## STIMULATOR OVERVIEW

			4	<b>∂</b> <del>(</del> } •				
MagPro Model		XP Orange	X100 MO	X100	R30 MO	R30	R20 Family	Compact
	250 pps	•	●6	●6				
	100 pps		•	•			•4	
	80 pps					<b>●</b> ¹		
Maximum Repetition Rate	60 pps					$\bullet^2$		
	30 pps				•	•		
	20 pps						•	
	5 pps							•
Pulse	Power Mode		•					
Mode	Dual/Twin		•		•			
	Standard	•	•	•	•	•	•	•
	Biphasic	•	•	•	•	•	•	•
Waveform	Theta Burst (Biphasic Burst)	•	•	•		•3	<b>●</b> <sup>5</sup>	
	Monophasic		•	•	•			
	Half-Sine		•					
Current Direction	Normal and Reverse		•	•				
Sham Noise	(Add-on)	•	•	•	•	•		



Can be used with the MagVenture double-blind reserach software

Translational research compatible


- With 80 pps option
   With 60 pps option
   With TBS option
   R20+ or MagPro R20+ Express
   MagPro R20+ Express
   With 250 pps option









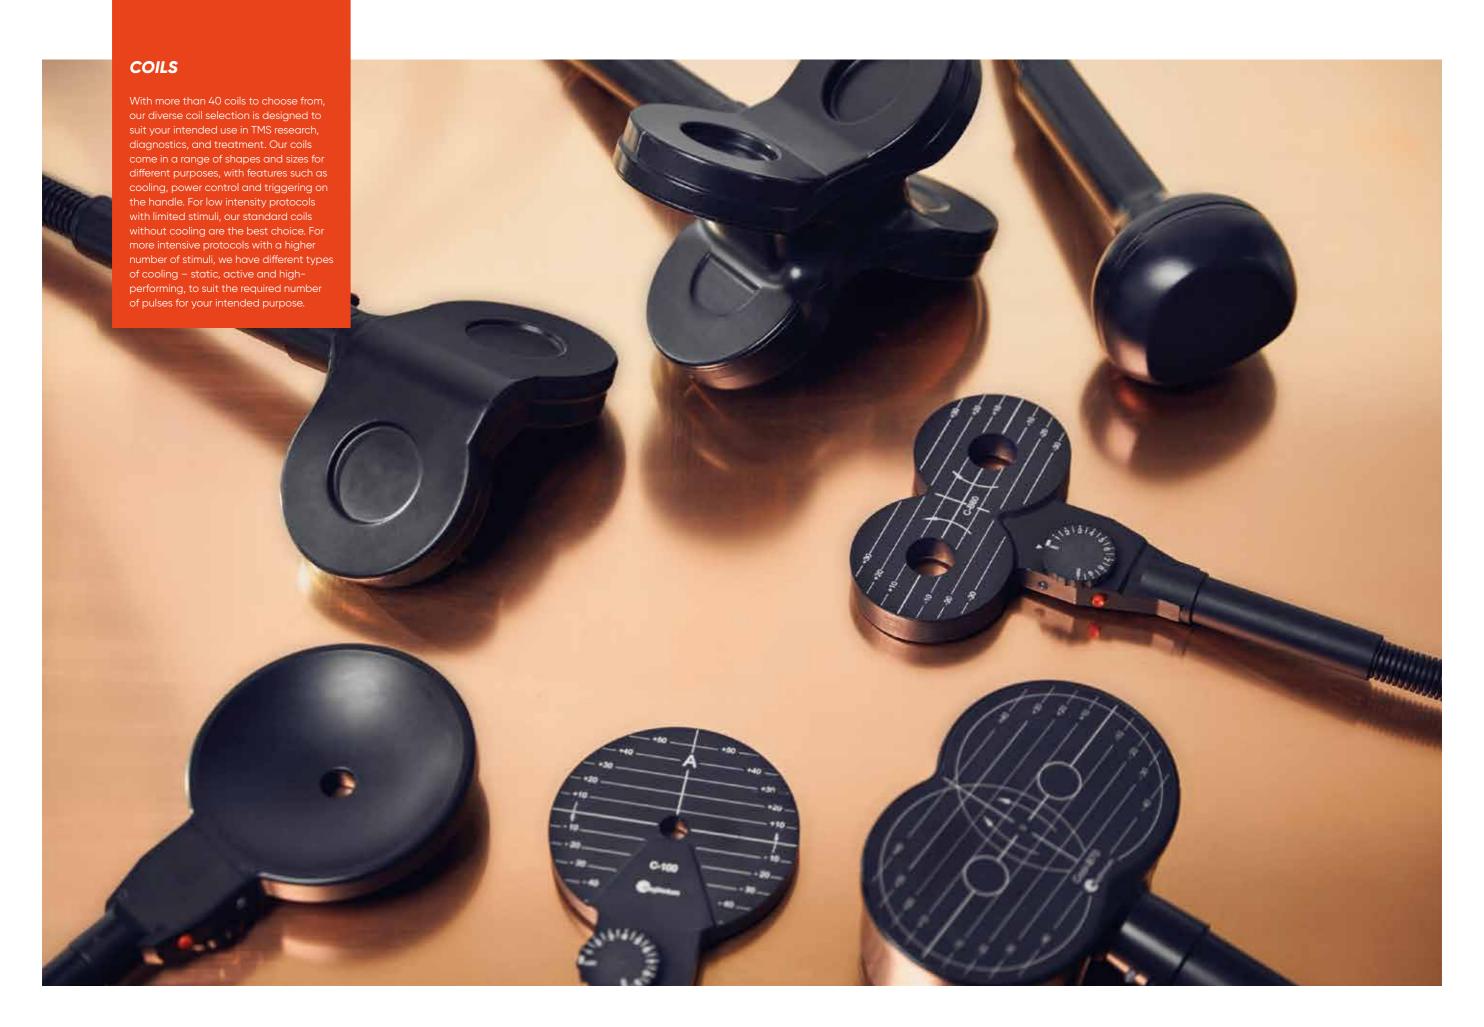



### **COIL FAMILY**

Active cooling: A coil with dynamic cooling liquid pumped between the coil and an ambient room temperature heat exchange system (cooler). Allowing intensive


#### Static cooling:

A coil with a static heat sink, allowing treatment to be performed without over-heating of the coil.

TMS-Robot/Cobot (RO/CO): A coil designed especially to be moved by an Axilum Robot. The first generation is referred to as "Robot", the second generation is referred Active/Placebo (A/P): A double-sided coil with an active side and an inactive (placebo) side, which look exactly the same. The internal orientation switch and research

Placebo (P): An inactive coil with the same sound as the active coil. Allows for single-blind studies.

Coil shape	No cooling	* Static cooling (MCF-series)	Active cooling (Cool-series)
	-	MCF-75	-
Circular	C-100 Intensity wheel	-	-
	MC-125	MCF-125	Cool-125
		MCF-140	-
	MMC-90	-	-
Parabolic	MMC-140 MMC-140-II Intensity wheel MMC-140 A/P		-
	MC-B35	-	Cool-B35 Cool-B35 RO Cool-B35 HO Orthogonal
<b>Butterfly</b> (Figure of 8)	C-B60 Intensity wheel MC-B65-HO Orthogonal	MCF-B65 MCF-P-B65	Cool-B65 Cool-B65 A/P Cool-B65 RO Cool-B65 CO Cool-B65 A/P RO Cool-B65 A/P CO
	C-B70 Intensity wheel MC-P-B70	MCF-B70 MCF-P-B70	Cool-B70 Cool-B70 A/P
	MC-B70		Cool-B70 CO
	D-B80 D-B110	-	Cool D-B80 Cool D-B80 A/P
	MRI-B91	-	MRI-B91 Air Cooled
Elliptical (Racetrack)	RT-120 RT-120-II Intensity wheel	-	-
D-shape	-	-	Cool-D50
Rat Coil	-	-	Cool-40 (Rat Coil)

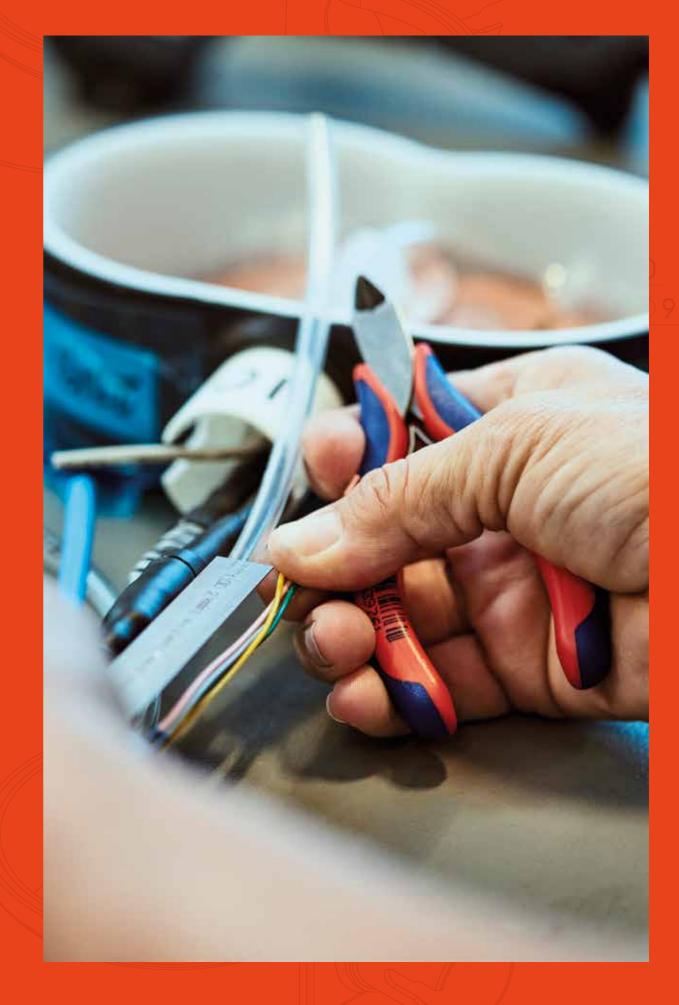



#### C-100

A circular coil, without cooling, suitable for diagnostic use. Equipped with power control and a trigger button for ease of operation.



	Part no.	Shape	Cooling	Placebo
	9016E0582	Circular	No cooling	No
Oı	uter diameter	ø12	3 mm / 4.84 in.	
Penetration depth (70 V/m)		O V/m) 39.6	39.6 mm / 1.56 in.	
Magnetic field		Gro	adient at 20 mm: 21 kT	//s

#### MC-125


A circular coil, without cooling, suitable for diagnostic use. Equipped with power control and a trigger button for ease of operation.



Part no.	Shape	Cooling	Placebo
9016E0555	Circular	No cooling	No
Outer diameter	ø130	mm / 5.12 in.	
Penetration depth (70	V/m) 38.5	mm / 1.52 in.	
Magnetic field		lient at 20 mm: 18 kT/	/s

#### MMC-90

A parabolic-shaped coil, without cooling, focused and compact stimulation. Suitable for stimulation of selected neuromuscular units based on its size and shape. Equipped with a trigger button on the handle for ease of operation.

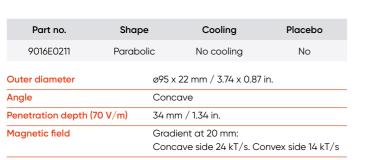



#### MMC-140

A parabolic-shaped coil, without cooling, for broad and deep stimulation. The concave and convex shape gives flexibility in the placement of coil during stimulation. Equipped with a trigger button on the handle for ease of operation.

Part no.	Shape	Cooling	Placebo
9016E0573	Parabolic	No cooling	No
Outer diameter	ø143	x 14.5mm / 5.63 x 0.5	57 in.
Angle		Concave	
Penetration depth (70 V/m)		43.4 mm / 1.70 in.	
Magnetic field		lient at 20 mm: 21 kT	./s



#### MMC-140-II

A parabolic-shaped coil, without cooling, for broad and deep stimulation. The concave and convex shape gives flexibility in the placement of coil during stimulation. Equipped with power control and a trigger button on the handle for ease of operation. The coil can handle more stimulation before overheating than the MMC-140 version.

Part no.	Shape	Cooling	Placebo	
9016E0631	Parabolic	No cooling	No	
Outer diameter	ø143	x 17 mm / 5.63 x 0.67	in	
Angle		Concave		
Penetration depth (70 V/m)		44.3 mm/ 1.74 in.		
Magnetic field		Gradient at 20 mm: 20 kT/s		



#### MMC-140 A/P

A parabolic-shaped active/placebo coil, without cooling, for advanced clinical studies with double-blind experiments. With identical electrical and magnetic properties to the MMC-140-II, it functions as both an active (A) and placebo (P) coil. The symmetrical design gives no indication of which is the active side and which is the placebo side.

Part no.	Shape	Cooling	Placebo
9016E0251	Parabolic	No cooling	Yes
Outer diameter		mm / 5.7 in	
Angle		cave	
Penetration depth (70 V/m)		44.3 mm / 1.74 in. (Active side)	
Magnetic field (acti	ve side) Grad	dient at 20 mm: 9 kT/	s

Note: An active/placebo coil with active magnetic stimulation on one side and no magnetic stimulation on the other side.

























Part no.	Shape	Cooling	Placebo
9016F0511	Circular	Active cooling	No

Outer diameter	ø140 mm / 5.51 in.
Penetration depth (70 V/m)	37.7 mm / 1.48 in.
Magnetic field	Gradient at 20 mm: 16 kT/s



#### MCF-75

Part no.

9016E0021

Outer diameter

Magnetic field

MCF-140

on the handle for ease of use.

A circular coil with static cooling that provides very high field strength near the skin, optimal for peripheral stimulation. Designed for demanding stimulation protocols that require a higher number of stimuli without external cooling. Equipped with a trigger button on the handle for ease of operation.

A large, circular coil designed to deliver broad and deep stimulation.

stimulation protocols requiring a high number of stimuli without the need for external cooling. It also includes a convenient trigger button

Coolina

Static cooling

Gradient at 20 mm: 20kT/s

169 mm/ 6.65 in.

Placebo

The MCF-140 features static cooling, enabling it to support

Shape

Part no.	Shape	Cooling	Placebo
9016E0442	Circular	Static cooling	No
Outor diameter	<b>~</b> 00	mm / 7 EO in	

Outer diameter ø88 mm / 3.50 in. Penetration depth (70 V/m) 26.7 mm / 1.05 in. Gradient at 20 mm: 15 kT/s Magnetic field



#### MCF-125

A large circular coil providing broad and deep stimulation. The MCF-125 has static cooling and is designed for stimulation protocols, that require higher number of stimuli without the need for external cooling. Equipped with a trigger button on the handle for ease of operation.

Part no.	Shape	Cooling	Placebo
9016E0413	Circular	Static cooling	No
Outer diameter	ø14(	0 mm / 5.51 in.	
Penetration depth (70 V/m)		mm / 1.54 in.	

Gradient at 20 mm: 16 kT/s



Cool-125

deep stimulation. The Cool-125 coil has the same electrical and magnetic properties as the MCF-125, designed for protocols that require a very high number of stimuli. Equipped with a trigger button on the handle for ease of operation.

01/0	/D-4 C-11
Cool-40	(Kat Coll)

A circular coil, with active cooling, designed for studying the effects of TMS in rodents. For animal studies only. Not for human use. The Cool-40 (Rat Coil) can be used in PET or SPECT imaging scanners. The coil size fits in bore size down to Ø12 cm in diameter. Requires a high-performance cooling system.

Part no.	Shape	Cooling	Placebo
9016E0241	Circular	Active cooling	No
Outer dimensions	52 x	54 mm / 2 x 2.1 in.	
Penetration depth (70 V/m)		10.2 mm / 0.4 in.	
Magnetic field		dient at 20 mm: 9 kT/s	5

Note: Not for human use.



A butterfly-shaped coil, without cooling, for focused stimulation of small areas of the brain, peripheral nerves and muscles. The MC-B35 has a compact design with the handle placed orthogonal to the coil surface. Equipped with a trigger button on the handle for ease of operation. Can also be used with the MagPro Compact stimulator with converter. Because of its size, the MC-B35 coil allow for a multi-channel set-up in clinical research.

	Part no.	Shape	Cooling	Placebo
	9016E0671	Butterfly	No cooling	No
0	uter dimensions	103 >	c 55 mm / 4.05 x 2.16	in.
Pe	enetration depth (7	0 V/m) 27.5	mm / 1.08 in.	





Magnetic field



Gradient at 20 mm: 10 kT/s














Magnetic field

#### C-B60

A butterfly-shaped coil, without cooling, for focused stimulations. Equipped with power control and a trigger button on the handle for ease of operation. To use for motor threshold determination, combine with treatment coils Cool-B65 and MCF-B65.





#### D-B80

A double-cone coil, without cooling. The D-B80 is specifically designed to reach deeper cortical structures, the coil is concave at a 120° angle to suit the shape of the head. Equipped with a trigger button on the handle for ease of operation.

Part no.	Shape	Cooling	Placebo
9016E0431	Butterfly	No cooling	No
Outer dimensions	196	x 106 mm / 7.7 x 4.17 i	n.
Angle	120°		
Penetration depth (70 V/m)		′ mm / 1.68 in.	
Magnetic field		dient at 20 mm: 12 k1	T/s



#### D-B110

The D-B110 is a double-cone coil without cooling, specifically designed for targeting deeper cortical structures. Its concave design, angled at 120°, is shaped to fit the contours of the head. The coil is equipped with a trigger button on the handle for convenient operation.

Part no.	Shape	Cooling	Placebo
9016E0011	Concave	No cooling	No
Outer dimensions	126 m	nm/ 4.96 in.	
Magnetic field	Grac	dient at 20mm: 11kT/s	3



#### MC-B65-HO-2

A butterfly-shaped coil with 2-meter cable length, without cooling. The coil handle is placed orthogonal to the coil housing.



Part no.	Shape	Cooling	Placebo	
9016E0462	Butterfly	No cooling	No	
Outer dimensions	165 x	85 mm / 6.5 x 3.35 in	ı.	
Penetration depth (70	O V/m) 32.7 i	32.7 mm / 1.29 in.		
Magnetic field	Grac	lient at 20 mm: 9 kT/	S	

#### MC-B65-HO-8

A butterfly-shaped coil with 8-meter cable length, without cooling. The coil handle is placed orthogonal to the coil housing.



Part no.	Shape	Cooling	Placebo
9016E0472	Butterfly	No cooling	No
Outer dimensions	165 x	85 mm / 6.5 x 3.35 ir	٦.
Penetration depth (70 V/m)		32.7 mm / 1.29 in.	
Magnetic field		dient at 20 mm: 9 kT/	's

#### MC-B70

Part no.

9016E0564

Penetration depth (70 V/m)

Outer dimensions

Magnetic field

Angle

A butterfly-shaped coil, without cooling, for focused stimulation. The MC-B70 coil is slightly concave to suit the shape of the head. The special design results in a low a motor threshold level. Equipped with a trigger button on the handle for ease of operation.

Shape

Butterfly

150°

37.3 mm / 1.47 in.













Cooling

No cooling

 $169 \times 112 \; mm \; / \; 6.65 \times 4.40 \; in.$ 

Gradient at 20 mm: 15 kT/s











#### MC-P-B70

A placebo coil for single-blind studies with a mechanical outline and sound level identical to MC-B70. The MC-P-B70 coil's magnetic shield reduces the magnetic field by approximately 80%. The coil has a slightly concave surface to suit the shape of the head.



Part no.	Shape	Cooling	Placebo
9016E0592	Butterfly	No cooling	Yes
Outer dimensions	169 x	112 mm / 6.7 x 4.4 in.	
Angle	150°		

Note: This is a placebo coil with no active magnetic stimulation.

#### C-B70

A butterfly-shaped coil, without cooling, suitable for focused stimulations. Equipped with power control and a trigger button on the handle for ease of operation. The specific configuration of C-B70 allows for motor mapping even in difficult cases. The C-B70 coil has the same magnetic field strength as the Cool-B70 coil when used with an appropriate marking plate.

Part no.	Shape	Cooling	Placebo
9016E0141	Butterfly	No cooling	No
Outer dimensions	170	0 x 113 mm /6.69 x 4.45 ir	٦.
Angle		O°	
Penetration depth (70 V/m)		3 mm / 1.47 in.	
Magnetic field		adient at 20 mm: 15 kT/	s



#### MCF-B65


A butterfly-shaped coil, with static cooling, designed for protocols that require a high number of stimuli without external cooling. Equipped with a trigger button on the handle for ease of operation.

Part r	10.	Shape		Cooling		Placebo	
9016E0	423	Butterfly	/	Static coolin	g	No	
Outer dime	nsions		172 x 92	mm / 6.9 x 3.	7 in.		
Penetration depth (70 V/m)			31.5 mm / 1.24 in.				
Magnetic field			Gradier	nt at 20 mm: 9	9 kT/s		



#### MCF-P-B65

A butterfly shaped placebo coil with static cooling. The MCF-P-B65 coil has a mechanical outline, sound level, and available stimuli identical to MCF-B65. The coil's magnetic shield reduces the magnetic field by approximately 80%. Equipped with a trigger button on the handle for ease of operation.



Note: This is a placebo coil with no active magnetic stimulation.

## 9016E0601 Outer dimensions $174 \times 94 \text{ mm} / 6.8 \times 3.7 \text{ in.}$

### MCF-B70

Part no.

A butterfly-shaped coil, with static cooling, for highly focused protocols that require higher number of stimuli without external cooling. Equipped with a trigger button on the handle for ease of operation. Designed with a slightly concave surface for best contact with the skull and reduced motor threshold level.

Part no.	Shape	Cooling	Placebo	
9016E0401	Butterfly	Static cooling	No	
Outer dimensions		180 x 116 mm / 7.1 x 4.6 in.		
Angle		150°		
Penetration depth (70 V/m)		34.0 mm / 1.34 in.		
Magnetic field		idient at 20 mm: 12 kT/	/s	



♀ ※

#### MCF-P-B70

A butterfly shaped placebo coil with static cooling. The MCF-P-B70 coil has a mechanical outline, sound level, and available stimuli identical to MCF-B70. Butterfly-shaped, with static cooling. The coil's magnetic shield reduces the magnetic field by approximately 80%. Equipped with a trigger button on the handle for ease of operation.

Part no.	Shape	Cooling	Placebo
9016E0201	Butterfly	Static cooling	Yes
Outer dimensions	180	x 116 x 45 mm	
Angle	150°	)	

Note: This is a placebo coil with no active magnetic stimulation.






















#### Cool-B35

A butterfly-shaped coil, with active cooling, suitable for focused stimulation, with similar properties to the MC-B35. It has a large ergonomic handle. Equipped with a trigger button on the handle for ease of operation.

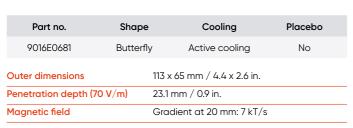



#### Cool-B35 RO

A butterfly-shaped coil, with active cooling. Specifically designed for use in an Axilum robot system solution. The Cool-B35 RO is based on the standard Cool-B35 coil but has a longer cable and no trigger switch or LED in the handle.

Part no.	Shape	Cooling	Placebo	
9016E0101	Butterfly	Active cooling	No	
Outer dimensions	113 >	x 65 mm / 4.4 x 2.6 in.		
Penetration depth (70	0 V/m) 23.1	23.1 mm / 0.9 in.		
Magnetic field		dient at 20 mm: 7 kT/s	i	



#### Cool-B35 HO

A butterfly-shaped coil, with active cooling, suitable for focused stimulation, with similar properties as the MC-B35. It has a compact design with an orthogonal coil handle.. Equipped with a trigger button on the handle for ease of operation.


Part no.	Shape	Cooling	Placebo	
9016E0111	Butterfly	Active cooling	No	
Outer dimensions		x 65 mm / 4.4 x 2.6 in.		
Penetration depth (70 V/m)		23.1 mm / 0.9 in.		
Magnetic field		dient at 20 mm: 7 kT/s	5	



#### Cool-B65

A butterfly-shaped coil, with active cooling, for focused stimulation, designed for protocols that require a very high number of stimuli. Optimized for high repetition rates and long pulse trains. Cooled by an external Cooler Unit. Equipped with a trigger button on the handle for ease of operatio.

Part no.	Shape	Cooling	Placebo
9016E0491	Butterfly	Active cooling	No
Outer dimensions	172	x 92 mm / 6.8 x 3.6 in.	
Penetration depth (70 V/m)		mm / 1.24 in.	
Magnetic field		dient at 20 mm: 9 kT/s	5



#### Cool-B65 RO

The Cool-B65 RO coil is designed specifically for use with an Axilum Robotics Robot system solution. The coil has the same properties as the standard Cool-B65 coil - butterfly-shaped, with active cooling, for focused stimulation and demanding protocols that require a very high number of stimuli. Optimized for high repetition rates and long pulse trains. Cooled by an external Cooler Unit. The RO version has a longer cable.

Part no.	Shape	Cooling	Placebo
9016E0221	Butterfly	Active cooling	No
Outer dimensions	172	x 92 mm / 6.8 x 3.6 in.	
Penetration depth (70	O V/m) 31.5	mm / 1.24 in.	
Magnetic field	Gra	dient at 20 mm: 9 kT/s	5



#### Cool-B65 CO

The Cool-B65 CO coil is designed specifically for use with an Axilum Robotics Cobot system solution. The coil has the same properties as the standard Cool-B65 coil - butterfly-shaped, with active cooling, for focused stimulation and demanding protocols that require a very high number of stimuli. Optimized for high repetition rates and long pulse trains. Cooled by an external Cooler Unit. The CO version does not have a trigger switch or LED in the handle.

Part no.	Shape	Cooling	Placebo	
9016E0151	Butterfly	Active cooling	No	
Outer dimensions 172 x 92 mm / 6.8 x 3.6 in.				
Penetration depth (70 V/m)		mm / 1.24 in.		
Magnetic field	Gra	dient at 20 mm: 9 kT/s	;	






















#### Cool-B65 A/P

A butterfly-shaped active/placebo coil, with active cooling, for clinical studies with double-blind experiments. The symmetrical design gives no indication of which is the active side and which is the placebo side. An adjustable output for current stimulation of the patient's skin synchronously with magnetic stimulation pulses is built in.



Note: This is an active/placebo coil with active magnetic stimulation on one side and no magnetic stimulation on the other side.



#### Cool-B65 A/P RO

An active/placebo coil with the same properties as the Cool-B65 A/P, designed for use in an Axilum Robotics Robot system solution. The RO version has a longer cable and does not have a trigger switch or LED in the handle.

	Part no.	Shape	Cooling	Placebo
	9016E0231	Butterfly	Active cooling	Yes
(	Outer dimensions		172 x 92 mm / 6.8 x 3.6 in.	
Ì	Penetration depth (70	V/m)	31.5 mm / 1.24 in. (active side)	
i	Magnetic field (active	side)	Gradient at 20 mm: 9 kT/s	

Note: This is an active/placebo coil with active magnetic stimulation on one side and no magnetic stimulation on the other side.



#### Cool-B65 A/P CO

An active/placebo coil with the same properties as the Cool-B65 A/P, designed for use in Axilum Robotics Cobot system solution. The RO version does not have a trigger switch or LED in handle. Only for use with double-blind research studies with MagPro R30/X100 (with or without MagOption).

ı	Part no.	Shape	Cooling	Placebo
9	016E0161	Butterfly	Active cooling	Yes
Outer	dimensions	17:	2 x 92 mm / 6.8 x 3.6 in.	
Penetration depth (70 V/m)			5 mm / 1.24 in. (active s	iide)
Magnetic field (active side)		ve side) Gi	radient at 20 mm: 9 kT/	S

Note: This is an active/placebo coil with active magnetic stimulation on one side and no magnetic stimulation on the other side.



#### Cool D-B80

A double-cone coil, with active cooling, for powerful stimulation. The Cool-D-B80 has the same electrical and magnetic properties as the D-B80. Specifically designed to reach deeper cortical structures, the coil is concave at a 120° angle to suit the shape of the head. Equipped with a trigger button on the handle for ease of operation.

Part no.	Shape	Cooling	Placebo	
9016E0531	Butterfly	Active cooling	No	
Outer dimensions	2 x (	o110 mm / 2 x ø4.33 in	ı.	
Angle	120°	•		
Penetration depth (70 V/m)		41.8 mm / 1.65 in.		
Magnetic field		dient at 20 mm: 11 kT,	/s	




#### Cool D-B80 A/P

A double-cone active/placebo coil, with active cooling, for advanced clinical studies with double-blind experiments. With identical electrical and magnetic properties to the D-B80 and the Cool D-B80 coils. The symmetrical design gives no indication of which is the active side and which is the placebo side.

Part no.	Shape	Cooling	Placebo
9016E0541	Butterfly	Active cooling	Yes
Outer dimensions	220	) x 115 mm / 8.7 x 4.5 ir	ì.
Angle	120	0	
Penetration depth (7	O V/m) 41.8	3 mm / 1.65 in. (active s	side)
Magnetic field (active side)		adient at 20 mm: 12 kT	/s

Note: This is an active/placebo coil with active magnetic stimulation on one side and no magnetic stimulation on the other side.



#### Cool-B70

A butterfly-shaped coil, with active cooling, suitable for focused stimulations and demanding protocols that require a very high number of stimuli. The Cool-B70 coil has electrical and magnetic properties comparable with the MCF-B70. Designed with a slightly concave surface for best possible contact with the skull. Equipped with a trigger button on the handle for ease of operation.

Part no.	Shape	Cooling	Placebo
9016E0521	Butterfly	Active cooling	No
Outer dimensions	180	x 116 mm/ 7.1 x 4.6 in.	
Penetration depth (70 V/m)		) mm / 1.34 in.	











Magnetic field



Gradient at 20 mm: 12 kT/s













#### Cool-B70 A/P

A butterfly-shaped active/placebo coil, with active cooling, for advanced clinical studies with double-blind experiments. With comparable electrical and magnetic properties to the MCF-B70 and Cool-B70 coils. The symmetrical design gives no indication of which is the active side and which is the placebo side.

Part	t no.	Shape	Cooling	I	Placebo
9016	E0121	Butterfly	y Active cool	ing	Yes
Outer dim	nensions		173 x 116 mm / 6.8 x	4.6 in.	
Angle		150°			
Penetration depth (70 V/m)		34.0 mm / 1.34 in. (c	active side)		
Magnetic field (active side)		Gradient at 20 mm	: 12 kT/s		

Note: This is an active/placebo coil with active magnetic stimulation on one side and no magnetic stimulation on the other side.



#### Cool-B70 CO

The Cool-B70 CO coil is specifically designed for integration with the Axilum Robotics Cobot system. Retaining the properties of the standard Cool-B70 coil, it features a butterfly shape and active cooling, making it ideal for focused stimulation and demanding protocols requiring a high number of stimuli. It is optimized for high repetition rates and extended pulse trains, with cooling provided by an external Cooler Unit. This coil is equipped with a trigger switch and a LED in the handle.

Part no.	Shape	Cooling	Placebo
9016E0181	Butterfly	Active cooling	No
Outer dimensions	180>	x116 mm/7.1x4.6 in.	
Penetration depth (70 V/m)		mm / 1.34 in.	
Magnetic field (active side)		dient at 20 mm: 12 kT/	s




#### MRI-B91

A butterfly-shaped coil, without cooling, designed for use in MRI scanners up to 4 Tesla. The MRI-B91 coil is suitable for focused stimulation. The special design allows for frequent stimulation inside the scanner without too many coil vibrations, reducing noise exposure. A built in counter shows remaining pulses/days.

	Part no.	Shape	Cooling	Placebo	
	9016E0661	Butterfly	No cooling	No	
Out	ter dimensions	17:	5 x 142 x 30 mm / 6.89 >	< 5.59 x 1.18 in.	
Penetration depth (70 V/m)		<b>0 V/m)</b> 31	31.5 mm / 1.22 in.		
Ma	gnetic field	G	radient at 20 mm: 8 kT/	's	



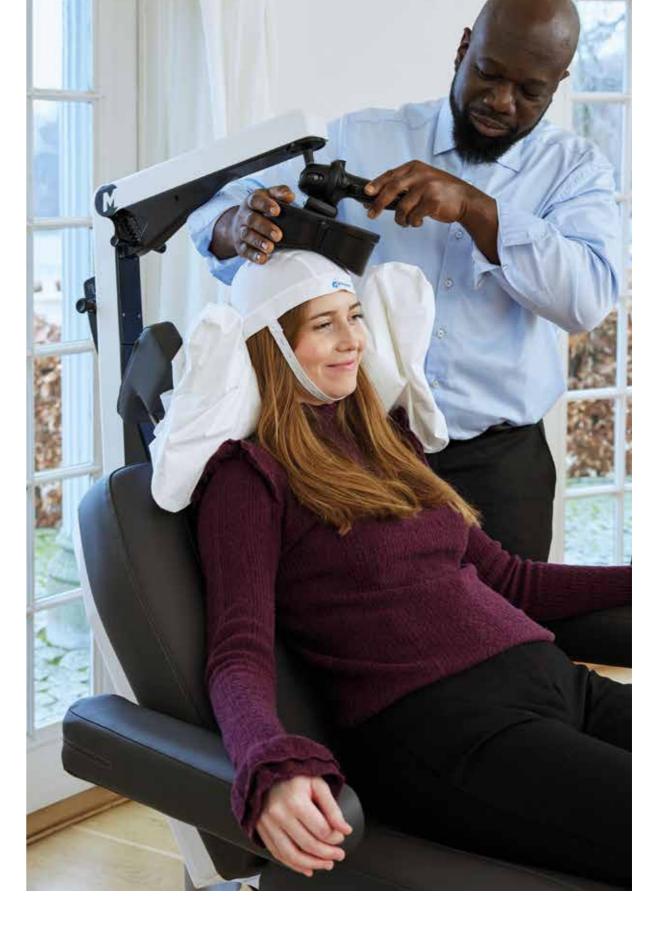























#### MRI-B91 Air Cooled

A butterfly-shaped coil, with compressed air-cooling, designed to run longer and tougher protocols inside MRI scanners up to 4 Tesla. The MRI-B91 Air Cooled coil is suitable for focused stimulation. The special design allows for low vibration stimulation and reduced noise exposure. A built in counter shows remaining pulses/days.

	Part no.	Shape	Cooling	Placebo
	9016E0271	Butterfly	Active cooling	No
Oı	uter dimensions	-	175 x 142 x 30 mm / 6.89 x 5	5.59 x 1.18 in.
Penetration depth (70 V/m)		V/m)	31.1 mm / 1.22 in.	
Mo	agnetic field	(	Gradient at 20 mm: 8 kT/s	



## Ever thought about what lies beneath the surface of a magnetic coil?









"For illustrative purposes only".

#### RT-120

An elliptical coil, without cooling, especially suited for stimulation of wider areas such as large muscles, with the coil placement aligned to the direction of the handle direction. Equipped with a trigger button for ease of operation.

Part no.	Shape	Cooling	Placebo
9016E0641	Elliptic	No cooling	No
Outer diameter	Q	990 x 175 x 26 mm / 3.54 x	c 6.89 x 1.02 in.
Penetration depth (70 V/m)		35.2 mm	
Magnetic field	(	Gradient at 20 mm: 15 kT,	/s



#### RT-120-II

An elliptical coil, without cooling, especially suited for stimulation of wider areas such as large muscles, spinal areas, with the coil placement parallel to direction of the handle direction. Equipped with power control and a trigger button for ease of operation.

Part no.	Shape	Cooling	Placebo
9016E0651	Elliptic	No cooling	No
Outer diameter	ø9i	0 x 200 x 26 mm / 3.54	x 7.87 x 1.02 in.
Penetration depth (70	O V/m) 35.	2 mm	
Magnetic field	Gro	adient at 20 mm: 15 kT	/s



#### Cool-D50

A research coil with D-shaped windings to produce an asymmetric field, with active cooling. The stimulation center is placed at the edge of the coil allowing for simultaneous stimulation of two centers in the brain only 2-3 cm apart using two Cool-D50 coils individually activated.

Part no.	Shape	Cooling	Placebo
9016E0291	D-shape	Active cooling	No
Outer dimensions	111 x	94 mm / 4.4 x 3.7 in.	
Penetration depth (70	<b>V/m)</b> 30.7	mm / 1.21 in.	
Magnetic field	Gra	dient at 20 mm: 16 kT/	S























### **COIL OVERVIEW**

#### **Circular Coils**

A "general purpose" coil which can be positioned over many parts of the body to stimulate a fairly large area.

Model	Shape	Cooling	<b>Diameter of handle</b> (øD in mm)
C-100 <sup>1</sup>	Circular	No cooling	ø29
MC-125	Circular	No cooling	ø29
MMC-90	Circular (Parabolic)	No cooling	ø29
MMC-140 MMC-140 II <sup>1</sup>	Circular (Parabolic)	No cooling	ø29
MCF-75	Circular	Static cooling	ø25
MCF-125	Circular	Static cooling	ø29
Cool-125	Circular	Active cooling	ø38
MCF-140	Circular	Static cooling	ø29
Cool-40 Rat Coil	Circular	Active cooling	

#### **Butterfly Coils**

The butterfly coil is useful in focused stimulation. The two windings are placed side-by-side which enables the coil to stimulate structures with focus right under its center.

Which chaples the conte	o stillidiate structures (	with locus right under its	Certier.
Model	Shape	Cooling	<b>Diameter of handle</b> (øD in mm)
MC-B35	Butterfly	No cooling	ø25
C-B60 <sup>1</sup>	Butterfly	No cooling	ø29
C-B70 <sup>1</sup>	Butterfly	No cooling	ø29
D-B80	Butterfly	No cooling	ø29
MC-B65 HO	HO Butterfly	No cooling	ø25
Cool D-B110	Butterfly	Active cooling	ø38
MC-B70	Butterfly	No cooling	ø29
MCF-B65	Butterfly	Static cooling	ø29
MCF-B70	Butterfly	Static cooling	ø38
Cool-B35 Cool-B35 RO Cool-B35 HO	Butterfly	Active cooling	ø38
Cool-B65 Cool-B65 RO Cool-B65 CO	Butterfly	Active cooling	ø38
Cool D-B80	Butterfly	Active cooling	ø38
Cool-B70	Butterfly	Active cooling	ø38
Cool-B70 CO	Butterfly	Static cooling	ø38
MRI-B91	Butterfly	No cooling	
MRI-B91 Air Cooled	Butterfly	Forced air	

#### Elliptical (Racetrack) and D-shaped Coils

Elliptical (Racetrack) coils are especially suitable for stimulation of wider areas. Use two D-shaped coils to simultaneously stimulate two centers in the brain only 2-3 cm / 1 inch apart.

Model	Shape	Cooling	<b>Diameter of handle</b> (ØD in mm)
RT-120	Racetrack	No cooling	ø25
RT-120 II <sup>1</sup>	Racetrack	No cooling	ø25
Cool-D50	D-shaped	Active cooling	ø38

#### Placebo Coils

Coils specifically developed for placebo studies. Some are for true double-blind research studies with both an active and a placebo side.

Model	Shape	Cooling	<b>Diameter of handle</b> (øD in mm)
MC-P-B70	Butterfly (Placebo)	No cooling	ø29
MCF-P-B65	Butterfly (Placebo)	Static cooling	ø29
Cool-B65 A/P Cool-B65 A/P RO Cool-B65 A/P CO	Butterfly (Active/Placebo)	Active cooling	ø38
Cool-B70 A/P	Butterfly (Active/Placebo)	Active cooling	ø38
Cool D-B80 A/P	Butterfly (Active/Placebo)	Active cooling	ø38
MMC-140 A/P	Circular (Parabolic, Active/Placebo)	No cooling	ø29
MCF-P-B70	Butterfly (Placebo)	Static cooling	ø38


 $\bigcirc\bigcirc\bigcirc\bigcirc\bigcirc\bigcirc$ 0000 Cool coils incl. high performance cooler:

 $\bigcirc\bigcirc\bigcirc\bigcirc\bigcirc$ 







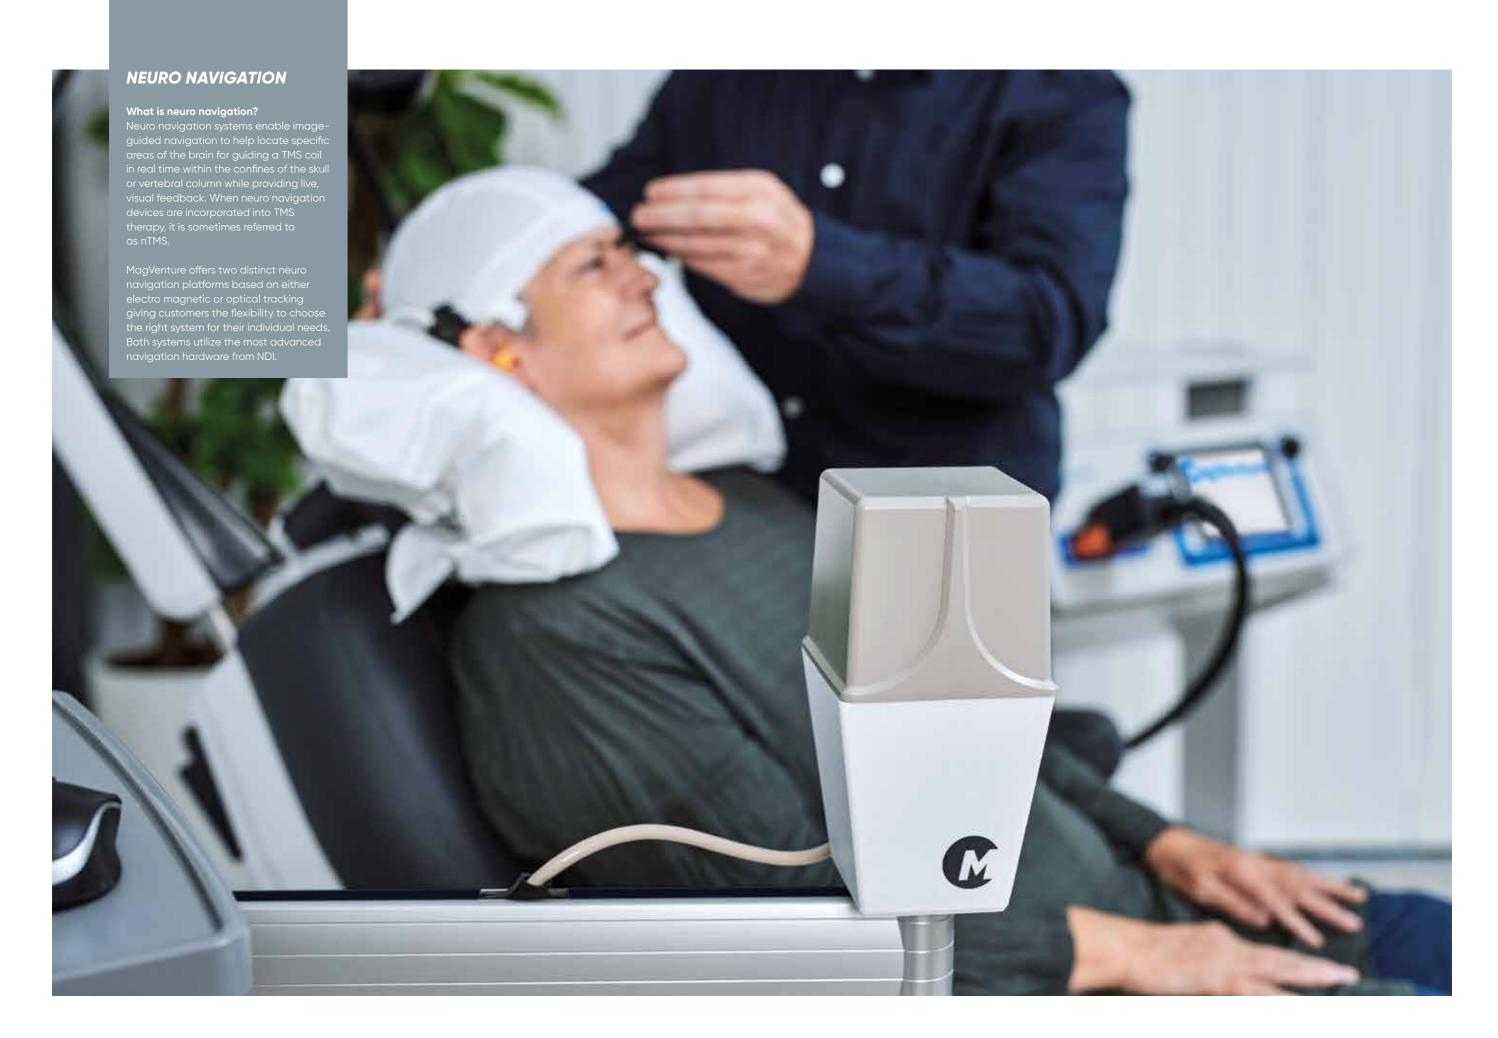



With TMS Navigator TS you can achieve the highest possible accuracy and maintain yourself the flexibility to personalize your TMS treatment to the uniqueness of your patient's brain.

Using individual MRIs is just as possible as falling back to a standard brain (MNI) that will be adapted to the patient. For target definition you are free to use either brain atlases, anatomical and even functional information.

- · Highest precision with optical tracking
- · Individualization by using either MRIs or individualized standard templates
- · Versatile treatment planning by either using universal or personalized targets
- · Integration with your MagVenture stimulator enables automatic documentation of your treatment protocol





Axilum Robotics Cobot solution ensures movement control and a high level of repeatability and accuracy between TMS sessions. It is especially suited for research and works with MagVenture stimulators and coils. It can be piloted by a neuro navigation system from Localite (MRI guidance).

- · High precision and accuracy for especially research use
- Maintains all parameters of TMS coil positioning (optical tracking)
- Compensates for potential head motion
- Maintains permanent contact between coil and head





Localite's optical neuro navigation tracking makes it easy to plan stimulation areas, visualize the stimulation spot, and monitor and record the precise position of the research subject and coil with complete replicability. This turnkey solution provides full integration with MagVenture's product portfolio including advanced research coils, allowing for automatic and easy exchange of all required information such as intensity, coil and stimulator type, MEPs and temperature.

- · Highest precision and accuracy developed especially for research use
- Easily scalable with and without MRI
- Optical tracking of up to four coils simultaneously
- · Works with more than 30 different MagVenture coils



MagVenture Atlas™ Neuro Navigation System is an accurate coil positioning system for the clinical application of transcranial magnetic stimulation (TMS) using electro magnetic (EM) tracking from NDI.

MagVenture Atlas™ uses a MRI data set for accurate coil positioning – targeting the exact treatment spot and making it easy to consistently reposition the coil for repeat treatments.


- · High precision and accuracy for clinical use
- · Optimized workflow for clinical routine work incl. easy registration, calibration and sensor placement that reduces the manual method with tap and marker pens
- No line-of-sight issues and a lower price point compared to optical tracking
- Allows for personalized, consistent and easily repeatable coil positioning
- · Can load and visualize individual MRI scans, tissue maps (e.g., gray matter), fMRI activation and craniotopic facial markers
- Integrates seamlessly with MagVentures' TMS therapy systems and subsequent treatment coils\* (\*Current MagVenture coils are C-B60, MCF-B65, Cool-B65, C-B70, MCF-B70, Cool-B70, Cool D-B80).
- Increased patient involvement increases confidence and trust
- · Lightweight, compact and easy to set-up
- User-friendly interface

Part no. 9017M0011 EU Part no. 9018M0011



Meuro Navigation Neuro Navigation 43



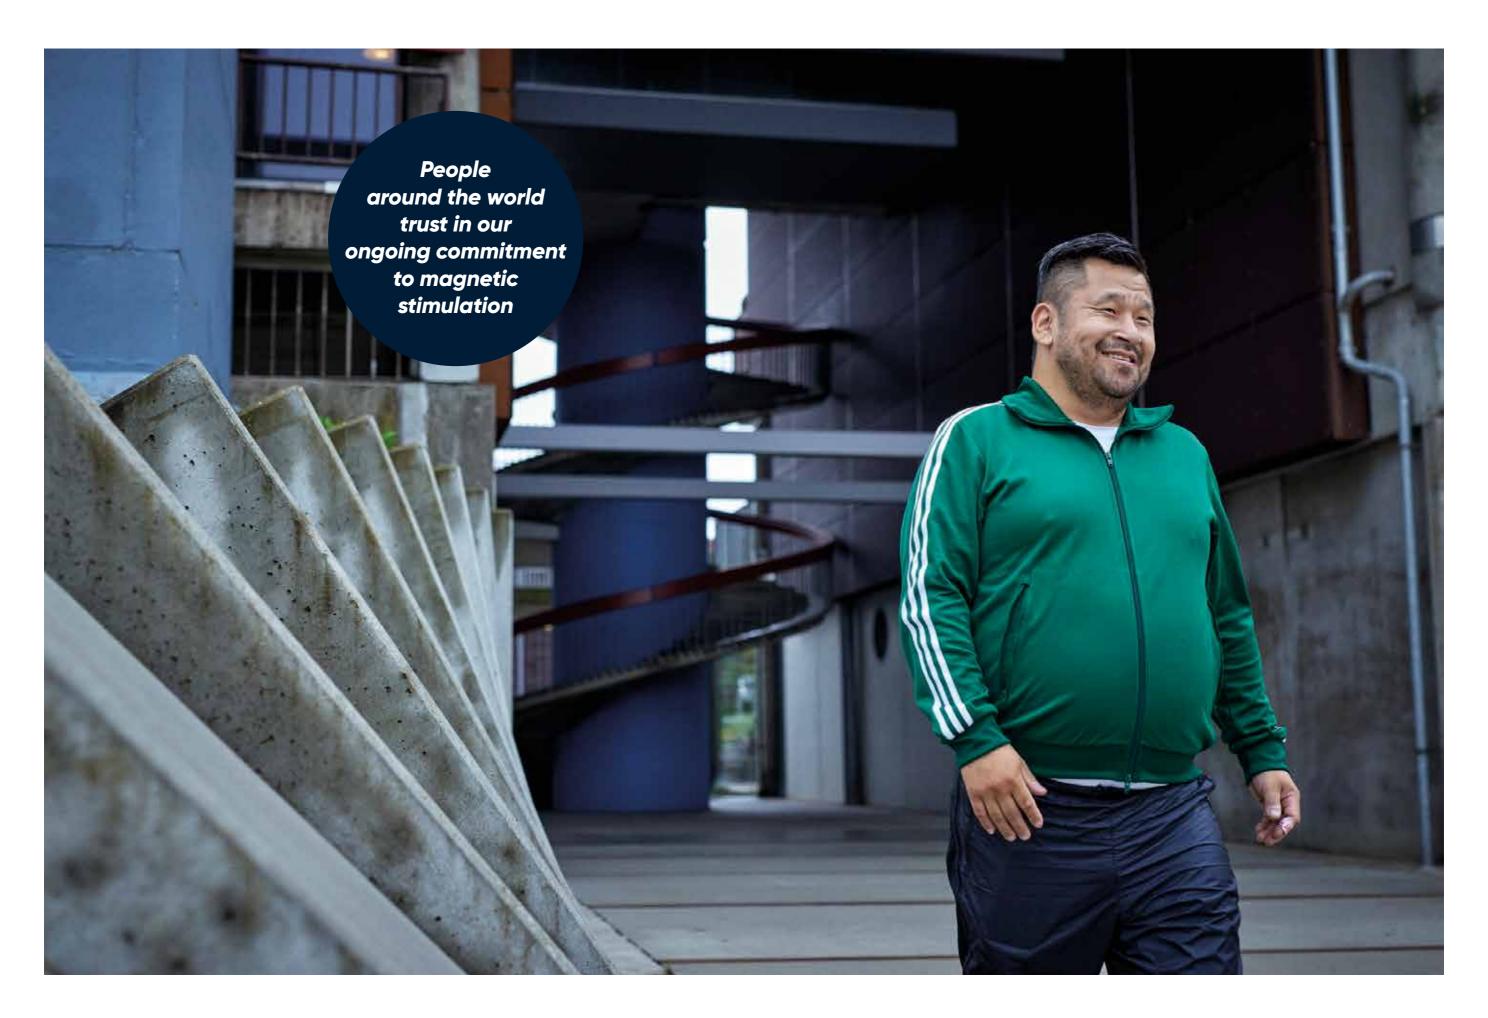



### Trolley for MagPro X/R - Standard

A trolley specially designed to hold a complete TMS system with an R or X model MagPro stimulator, isolation transformer, coil cooler unit and vacuum pump unit. Complete with a flexible arm, sham noise generator and other acc trolley comes in two sizes, a standard model and a (with an extra shelf). Suitable for MagPro R30, Mag MagOption, MagPro X100 and MagPro X100 with N

n mounting for ecessories. The a high model gPro R30 with MagOption.	
mensions	
64 x 55 cm	

Part no.	Weight	Dimensions
9016B0102	17 kg / 37.5 lbs	80 x 64 x 55 cm 31.5 x 25.2 x 21.65 in.

### Trolley for MagPro X/R - High

A trolley specially designed to hold a complete TMS system with an R or X model MagPro stimulator, isolation transformer, coil cooler unit and vacuum pump unit. Complete with mounting for a flexible arm, and holders for coils and other accessories. The high trolley comes with an extra shelf on the top for additional accessories. Suitable for MagPro R30, MagPro R30 with MagOption, MagPro X100 and MagPro X100 with MagOption.

Part no.	Weight	Dimensions
9016B0431	25 kg / 55 lbs	128 x 64 x 55 cm 50.39 x 25.2 x 21.65 in.

## **Trolley for MagPro Compact and R20 Family**

A trolley specially designed to hold a MagPro Compact or a MagPro R20 system with Isolation transformer and vacuum pump unit. Complete with mounting for a flexible arm and sham noise generator and other accessories.



Part no.	Weight	Dimensions
9016B0381	17 kg / 37.5 lbs	80 x 64 x 55 cm / 31.5 x 25.2 x 21.65 in.

### Additional shelf for MagPro X/R Trolley

Part no.
9016B3111



#### **Coil Extension Power Cable**

To increase the cable length of a coil cable, 3 m and 5 m extension cables are available.

#### 3 meters

Part no.	Length
9016E4601	3 meters

#### 5 meters

Part no.	Length	
9016E4611	5 meters	

#### **Coil Lemo Extension Cable**

Combination of a Coil Extension Power Cable (above in two different lengths) and a Coil Lemo Extension cable (with 4p or 6p connector)

#### Coil 4p

Part no.	Length
9016E4621	5 meters

#### Coil 6p

Part no.	Length
9016E4631	5 meters



48 Accessories - Trolleys

#### **Coil Cooler for Cool Coils**

9016V0361:

A cooling system for MagVenture Cool coils. Equipped with special liquid cooling media.

Part no.	Weight	Dimensions
9016B0151	10 kg / 22 lb	200 x 300 x 300 mm / 7.9 x 11.8 x 11.8 in.
Mains Voltage		230V~, 50/60Hz according to IEC 60601-1
Max. Power Consump	otion	40W
Operation from		100-120V~ through Transformer.
MagVenture Isolation	Transformers	* 9016D0051: 100V~, 50/60Hz * 9016D0031: 120V~, 50/60Hz
9016H1001 + T1016101:	completely) + (	for cooler (2-3 pcs. is required to fill system Cooling Liquid Filler Tube (Male snap-connector 50 cm Ø6/8mm Tube for filling cooler)

Thumb screws kit for Coil Cooler faceplate (4 pcs.)



#### **High-Performance Option for Coil Cooler**

The High-Performance option for Coil Cooler is designed to increase cooling performance and allow for even more intensive protocols without the risk of overheating the coil.

Part no.	Weight	Dimensions
9016B0421	20 kg / 44 lbs	$375 \times 275 \times 235 \text{ mm} / 14.7 \times 10.8 \times 9.3 \text{ in.}$
Mains Voltage	230	0V~, 50/60Hz according to IEC 60601-1
Max. Power Consump	otion 30	OW
Operation from	from 100-120V~ through Transformer.	
MagVenture Isolation Transformers		016D0051: 100V~, 50/60Hz 016D0031: 120V~, 50/60Hz



#### **High-Performance Coil Cooling System**

A package consisting of the Coil Cooler for Cool Coils and the High-Performance Option for Coil Cooler

Part no.	Weight	Dimensions
9016B0411	10 kg / 22 lbs + 20 kg / 44 lbs	200 x 300 x 300 mm / 7.9 x 11.8 x 11.8 in. + 375 x 275 x 235 mm / 14.7 x 10.8 x 9.3 in.
Mains Voltage	23	30V~, 50/60Hz according to IEC 60601-1
Max. Power Consum	nption 30	00W + 40W = 340W

100-120V~ through Transformer.

\* 9016D0051: 100V~, 50/60Hz \* 9016D0031: 120V~, 50/60Hz



#### Super Flex Arm for Coils

Developed for easy and flexible positioning of magnetic coils, the Super Flex Arm has three joints – two ball joints which rotate in multiple directions and a central joint which rotates in one direction. All three joints can be locked and unlocked by the grip on the central joint. The Super Flex Arm works with all types of coils. It comes in two lengths – the longer arm is recommended for mounting on a trolly and the shorter arm is recommended for mounting on the backrest of the Treatment Chair. Mounting kits are also available.



#### Long

Part no.	Weight	Length – Vertical rod	Flexible rods	Coils
9016B0171	6.5 kg / 14.3 lbs	60 cm / 23.6 in.	2 x 40 cm / 2 x 15.7 in.	All coils up to ø38 mm (1.5 in.) handle
Short				
9016B0181	6 kg / 13.2 lbs	60 cm / 23.6 in.	2 x 25 cm / 2 x 9.8 in.	All coils up to ø38 mm (1.5 in.) handle

#### Flow Arm

MagVenture's patented Flow Arm is especially designed to support easy placement of the TMS coil, reducing effort and strain on the operator, making it ideal for multiple sessions in a day. It has been developed for clinical practice to optimize workflow, while maintaining accuracy and flexibility. The Flow Arm makes it easy to securely position the treatment coil and fits all treatment coils. Please note: Flow Arm only works with treatment chairs purchased after Q1 2017 (> sn1307 and all new orders for treatment chairs can carry the Flow Arm without modification)



Part no.	Height	Length	Weight	Supported coil weight
9016B0801	550 mm / 21.7 in.	450 mm / 17.7 in.	10 kg / 22 lbs excl counterweight 20 kg / 44 lbs incl counterweight	1.5-3 kg / 3.3-6.6 lbs

#### Flow Arm and Treatment Chair bundle package

Includes: 9016B0801 and 9016B0082.

Part no.
9016B0851

#### Flow Arm coil clamps ø29 – 2 pcs.

Two extra coil clamps for the Flow Arm, with diameter of 29 mm.

Part no.	
9016B0841	

#### Flow Arm coil clamps ø38 – 2 pcs.

Two extra coil clamps for the Flow Arm, with diameter of 38 mm.

Part no.	
9016B0811	

#### Flow Arm coil clamp A/P kit ø38 - 1 pcs.

An extra coil clamp for the Flow Arm, with diameter of 38 mm.

Part no.	
9016B0861	

Accessories - Cooling Systems

Accessories - Flexible Arms



Operation from

MagVenture Isolation Transformers



#### Treatment chair with neckrest - Newly improved

The newly improved Treatment Chair has been developed for use with the MagVenture TMS Therapy System®. The special neck rest is designed with a wide range of adjustment options for greatest possible comfort for the patient. The chair has adjustable height, seat angle, footrest, and backrest, operated by remote control. The Treatment Chair can be mounted with the Super Flex Arm or the Flow Arm for easy and secure placement of the different treatment coils.

Please note: Flow Arm only works with treatment chairs purchased after Q1 2017 (> sn1307 and all new orders for treatment chairs can carry the Flow Arm without modification).

Mandatory to power the Treatment Chair via the MagVenture Isolation

Transformer from 100-120-230V (see page 14).

Part no.	Color
9016B0081	Grey (anthracite) PVC upholstery
Width	63 cm / 24.8 in., without armrest 80 cm / 31.5 in., with armrest
Height	63-87 cm (24.8 - 34.3 in.)
Length	190 - 210 cm (74.8 - 82.7 in.)
Weight	85 kg / 187 lbs
Patient max. weight	150 kg / 330 lbs
Safe working load	235 kg / 517 lbs
Mains Voltage	230V~, 50/60Hz
Max. Power Consumption	50VA

9016V0331: Treatment Chair wheels (4 pcs.) for transportation/moving

#### Treatment Chair foot rest plastic cover

An additional plastic cover for the footrest of the Treatment Chair.



Part no. 9016B0451

#### Treatment Chair terry cover

An additional terry cloth cover for MagVenture's Treatment Chair.



Part no. 9016B0461

#### **Vacuum Pump Unit**

A vacuum pump for evacuating air from a vacuum pillow to support the patient's head during TMS. When air is evacuated, the pillow becomes stable in the chosen form and firmness. When the air valve is released, allowing air into the pillow, the vacuum pillow regains its flexibility and is ready to be shaped again. It is easily controlled by a foot switch.

Part no.	Dimensions
9016B0121	12 x 30 x 23 cm
761656121	12 % 00 % 20 0111
Mains Voltage	230V~, 50/60Hz
Max. Power Consumption	35VA

#### Vacuum Pillow 70 cm

The vacuum pillow is used around the patient's head or neck, the air is evacuated from the pillow with a foot-controlled vacuum pump so that

it becomes firm.





#### Pillowcase 70 cm

Additional cotton pillowcases (pack of 5) to fit MagVenture's vacuum pillow. 100% cotton, washable at 60°C (140°F).

Part no. 9016B0671

For existing customers with the old 55 cm vacuum pillow, additional cotton pillowcases (pack of 5) can still be ordered using part no. 9016B0261.



Accessories – Pump Unit & Pillows 53 Accessories - Treatment Chair

#### **Universal Coil & Connector Holder for Trolley/Wall**

When performing research or depression treatment with TMS, more than one coil is often used during the process.

The accessories kit, designed for easy placement of coils on the trolley, includes:

- Holder for a variety of coils incl. cool coils
- Holder for coil connector of TMS coil during motor threshold determination

Part no. 9016B0581 9016B0281



#### **Dual Slot Coil & Connector Holder for Trolley/Wall**

When performing research or depression treatment with TMS, more than one coil is often used during the process.

The accessories kit, designed for easy placement of coils on the trolley, includes:

- Holder for an extra standard coil, (e.g. C-B60 for motor threshold determination)
- Holder for TMS coil connector during motor threshold determination

Part no. 9016B0441 9016B0281



A bracket for attaching the Super Flex Arm to a wall.



Part no. 9016B0371


Part no.

9016B0177

**Additional Aluminum Mounting Bracket** with Lever for MagPro Super Flex Arm

Additional Flex Arm mounting bracket Trolley/Chair.





#### **Table Mount Bracket for Super Flex Arm**

A bracket for attaching the Super Flex Arm to a table.



Part no. 9016B0391

**Dual Slot Coil Holder for Trolley/Wall**  $(1 \times \emptyset 29 \text{ coil} + 1 \times \emptyset 38 \text{ coil})$ 

A holder for all MCF- and Cool-coils (besides MCF-75) and for standard coils with ø29 mm handle, attaching to a trolley or wall.



Part no. 9016B0351

#### Universal Coil Holder for Trolley/Wall (2 x ø29 coils + 2 x ø38 coils)

A holder for all MCF- and Cool-coils (besides MCF-75) and for standard coils with ø29 mm handle, attaching to a trolley or wall.



Part no. 9016B0361

#### **Accessories for Trolley** (coil connector holder)

Holder for an extra standard coil, designed for easy placement of coil on the trolley.

Part no.

9016B0281

## HANDLE DIAMETERS OF MAGVENTURE COILS


Diameter of handle Ø25 Coil type MC-B35 MC-B65-HO RT-120 RT-120-II MCF-75

**Diameter of handle Ø29** (ØD in mm) Coil type C-100 C-B60 C-B70 MC-B70 MC-P-B70 MC-125 D-B80 D-B110 MMC-90 MMC-140 MMC-140-II MMC-140 A/P MCF-B65 MCF-P-B65 MCF-125 MCF-140

**Diameter of handle Ø38** (ØD in mm) Coil type MCF-B70 MCF-P-B70 Cool-B35 Cool-B35 RO Cool-B35 HO Cool-B65 Cool-B65 RO Cool-B65 CO Cool-B65 A/P Cool-B65 A/P RO Cool-B65 A/P CO Cool-B70 Cool-B70 CO Cool-B70 A/P Cool-D50 Cool D-B80 Cool D-B80 A/P Cool-125



Accessories - Mountings & Holders 55 Accessories - Mountings & Holders

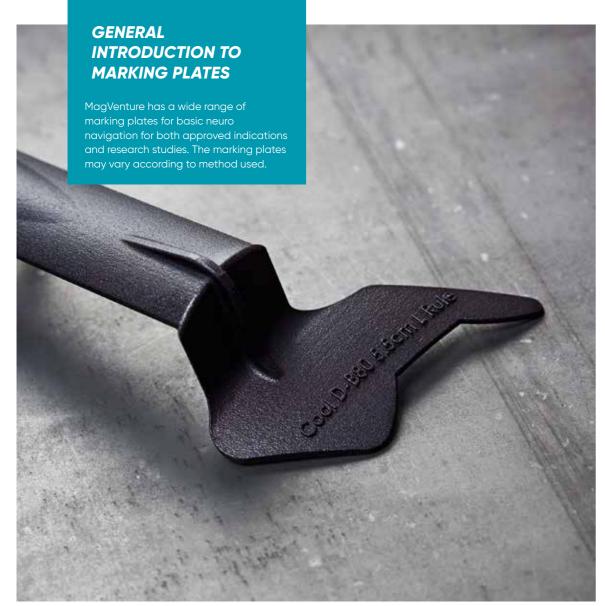



## Marking Plate and Accessories Kit

Compatible with	Left Orientation	Part no.	Right Orientation	Part no.	Marking plate
Coil C-B70	Left 5.5 cm	9016B0681	Right 5.5cm	9016B0691	
Coil Cool-B70 and Coil MCF-B70	BeamF3 Left 5 cm - hand held	9016B0751			
	BeamF3 Left 5.5 cm - hand held	9016B0761			
	Left 5.5 cm <sn3000< th=""><th>9016B0641</th><th>Right 5.5 cm <sn3000< th=""><th>9016B0631</th><th></th></sn3000<></th></sn3000<>	9016B0641	Right 5.5 cm <sn3000< th=""><th>9016B0631</th><th></th></sn3000<>	9016B0631	
	Left 5.5 cm >SN3000 (new)	9016B0642	Right 5.5 cm >SN3000 (new)	9016B0632	
Coil C-B60	Left 5 cm	9016B0191	Right 5 cm	9016B0521	
	Left 5.5 cm	9016B0501	Right 5.5 cm	9016B0531	
	Left 6 cm	9016B0511	Right 6 cm	9016B0541	
	Adjustable	9016B0561	Adjustable	9016B0561	
Coil Cool-B65	Left 5 cm	9016B0551			
Coil MCF-B65	Left 5.5 cm	9016B0571			
	Left 5.5 cm - hand held	9016B0821	Right 5.5 cm - hand held	9016B0	
Coil Cool D-B80	Left 5.5 cm	9016B0781			

#### Treatment accessories kit

An accessories kit for depression treatment with theta burst.

The kit includes: adhesive clips, textile pen, ear plugs, ruler, measuring tape, USB memory key, holder for trolley, labels for Cool D-B80 coil.



Part no.

9016B0331

Accessories - Marking Plates Accessories - Marking Plates 57





#### Textile Cap

A textile cap with a measurement pin for depression treatment when determining motor threshold, making it easy to mark and position the treatment coil. The patient ID and distance to the edge can be written on the cap, making it re-usable for that patient - one cap per patient. Optional chin straps are available.



			DCS.

Extra Small - 10 pcs.

Part no.

Small - 10 pcs.

Medium - 10 pcs.

Part no. 9016B0651

9016B0591

Part no. 9016B0201

Part no. 9016B0211

Large - 10 pcs.

Part no. 9016B0221

Extra Large - 10 pcs.

Part no.

9016B0231

Bundle - 10 pcs. of XS-S-M-L-XL

Part no. 9016B0601







## Diagnostics Package with MagPro Compact

Category	Part no.	Name
Stimulator	9016E0852	MagPro Compact
Coils	9016E0582	Coil C-100
A	9016B0381	Trolley for MagPro Compact and R20
Accessories	9016E4561	Triggercable - BNC





## Therapy Package with MagPro R20 Family

Category	Part no.	Name
Stimulator	9016E0911	MagPro R20+ Express incl. WiFi Option
Stillulator	9016D00X1	Isolation Transformer MagPro R & X Models
Coils	9016E0401	Coil MCF-B70
	9016B0381	Trolley for MagPro Compact & R20
	9016B0171	Super Flex Arm for Coils (short)
	9016B0081	Treatment Chair with neckrest
	9016B0121	Vacuum Pump Unit
Accessories	9016B0132	Vacuum Pillow 70 cm
	9016B0671	Pillowcase 70 cm (pack of 5 pcs.)
	9016B0641	Marking acc. f/MCF-B70 Click-On, 5.5cm
	9016B0441	Acc. for MagPro R20 Trolley (Depression)
	9016B0601	Textile Cap, Bundle 10 pcs of XS-S-M-L-XL





## Therapy Package with MagPro R30

Category	Part no.	Name
Stimulator	9016E0721	MagPro R30
Junidictor	9016D00X1	Isolation Transformer MagPro R & X Models
Coils	9016E0491	Coil Cool-B65
Colls	9016E0482	Coil C-B60
	9016B0151	Coil Cooler for Cool Coils
	9016B0081	Treatment Chair with neckrest
	9016B0181	Super Flex Arm for Coils (short)
	9016B0102	Trolley for MagPro X/R
Accessories	9016B0191	Marking acc. for Depression studies, Left 5cm
	9016B0121	Vacuum Pump Unit
	9016B0132	Vacuum Pillow 70 cm
	9016B0671	Pillowcase 70 cm (pack of 5 pcs.)
	9016B0601	Textile Cap, Bundle 10 pcs of XS-S-M-L-XL
Extras	9016E0361	Theta Burst Option for MagPro R30





## mPNS Package

Category	Part no.	Name
Stimulator	9016E0721	MagPro R30
Stillator	9016D00X1	Isolation Transformer MagPro R & X Models
	9016E0631	MMC-140-II
	9016E0651	RT-120-II
Coils	9016E0211	MMC-90
Colls	9016E0413	MCF-125
	9016E0491	Cool-B65
	9016E0511	Cool-125
	9016B0151	Coil Cooler for Cool Coils
Accessories	9016B0431	Trolley for MagPro X/R
	9016B0181	Super Flex arm for Coils (short)








Popular TMS Packages 63

## High Performance Therapy Package with MagPro R30

Category	Part no.	Name
Stimulator	9016E0721	MagPro R30
Stimulator	9016D00X1	Isolation Transformer MagPro R & X Models
	9016E0141	Coil C-B70
Coils	9016E0521	Coil Cool-B70
	9016E0531	Coil Cool D-B80
	9016B0151	Coil Cooler for Cool Coils
	9016B0081	Treatment Chair with neckrest
	9016B0801	Flow Arm incl. 2 x Clamp kit, ø38
	9016B0431	Trolley for MagPro X/R – High
	9016B0281	Accessories for Trolley
	9016B0361	Universal Holder for Coils Ø25-Ø38, cart/wall mount
	9016B0681	Marking acc. for Depr. (C-B70 Clips on) Left 5.5cm
Accessories	9016C0901	360 Gateway Unit (computer f/internet access)
	9016C0911	360 Monitor (touch screen f/computer)
	9016B0701	360 Mounting Kit (arm and bracket)
	9016P0201	360 Software License
	9016B0121	Vacuum Pump Unit
	9016B0132	Vacuum Pillow 70 cm
	9016B0671	Pillowcase 70 cm (pack of 5 pcs.)
	9016B0601	Textile Cap, Bundle 10 pcs of XS-S-M-L-XL
Extras	9016E0361	Theta Burst Option for MagPro R30











## Clinical Research Package with MagPro X100 with MagOption

Category	Part no.	Name
Stimulator	9016E0731	MagPro X100 incl. MagOption
Cumulato.	9016D00X1	Isolation Transformer MagPro R & X Models
	9016E0141	Coil C-B70
Coils	9016E0521	Coil Cool-B70
Cons	9016E0121	Coil Cool-B70 A/P
	9016E0541	Coil Cool D-B80 A/P
	9016S0161	Double Blinded Research Studies for MagPro
	9016B0151	Coil Cooler for Cool Coils
	9016B0081	Treatment Chair with neckrest
	9016B0801	Flow Arm incl. 2 x Clamp kit, ø38
	9016B0861	Flow Arm coil clamp A/P kit ø38 - 1 pcs.
A	9016B0102	Trolley for MagPro X/R
Accessories	9016B0361	Universal Holder f Coils Ø25-Ø38, cart/wall mount
	9016E4561	Cable Ext. Trig with BNC
	9016B0121	Vacuum Pump Unit
	9016B0132	Vacuum Pillow 70 cm
	9016B0671	Pillowcase 70 cm (pack of 5 pcs.)
	9016B0601	Textile Cap, Bundle 10 pcs of XS-S-M-L-XL

	9016B0421	High-Performance Option for Coil Cooler	
	9016C0701	MEP Monitor (incl. 1.5mm cable and electrodes)	
Add-c	Add-ons	9016E0341	250pps Option for MagPro X100
	9016B0681	Marking acc. for Depr. (C-B70 Clips on) Left 5.5cm	
	9016V0201	Noise Filters for optimized EEG usage	
		9016B3111	Additional Shelf for MagPro Cart










64 Popular TMS Packages

Popular TMS Packages 65

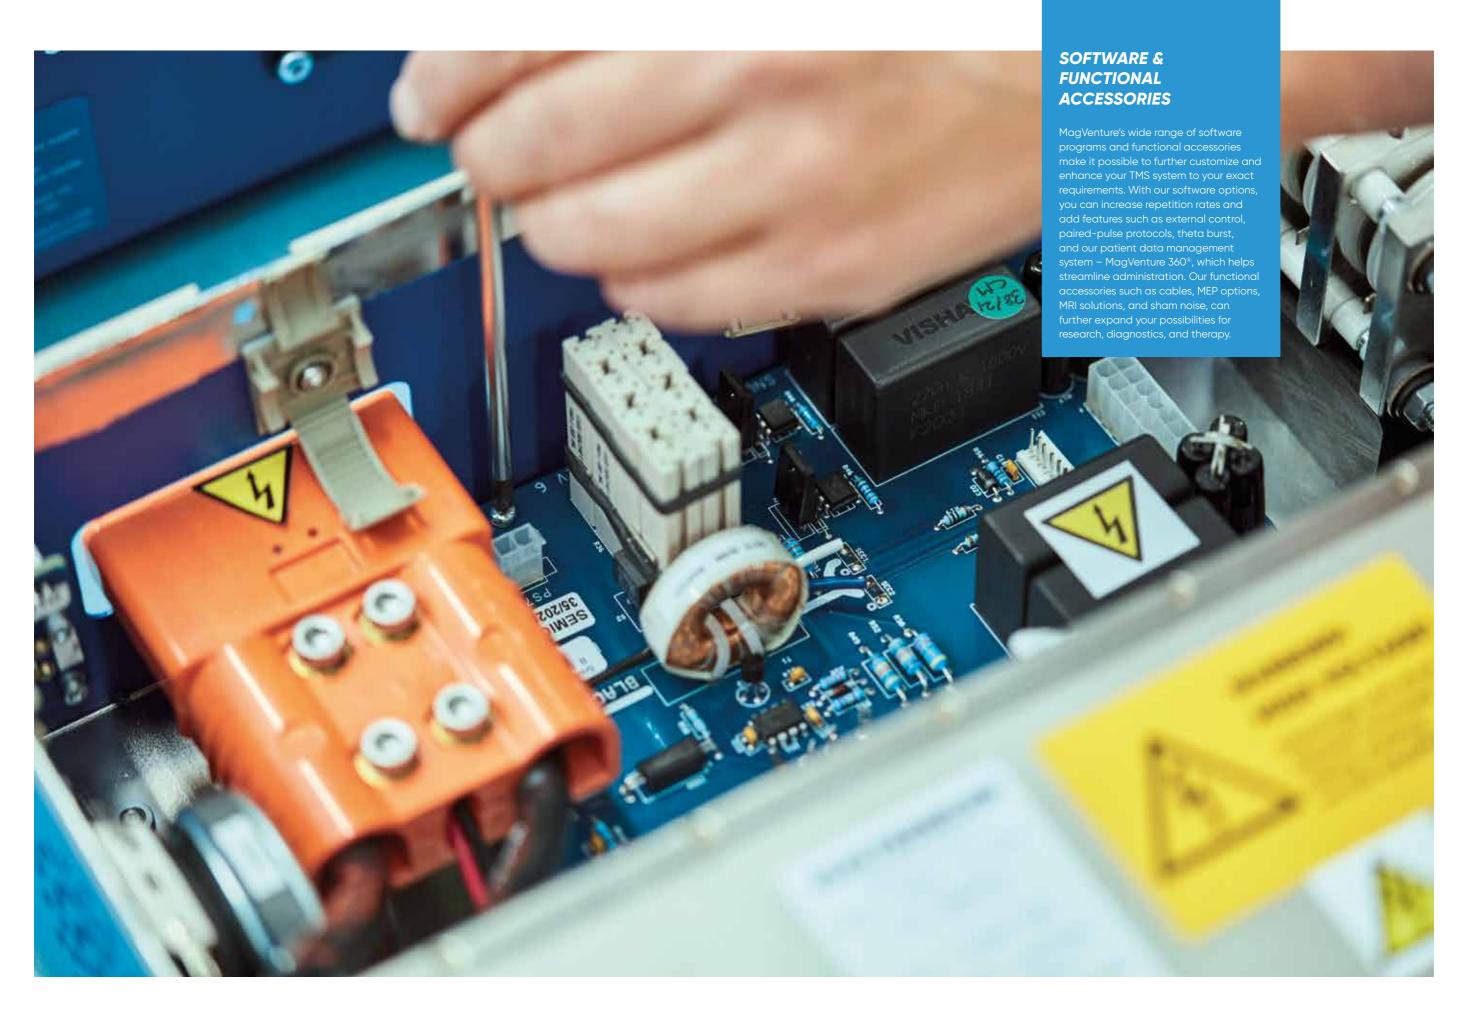

#### **External Control Software**

#### External Control Software for MagPro X/R

This software makes it possible to externally control a MagPro simulator and receive log information when a MagPro stimulator is placed in an equipment room behind the MRI-scanner room and away from the operator room. Only for the R30 and X100 stimulators.

> Part no. 9016S0141

#### MagPro R30, 60 pps option

A specialized software version that increases the repetition rate for a MagPro R30 from 30 Hz to 60 Hz.

Part no. 9016E0321

#### MagPro R30, 60 pps and **Theta Burst option**

A specialized software version that increases the repetition rate for a MagPro R30 from 30 Hz to 60 Hz and at the same time makes it possible for the MagPro R30 to stimulate theta burst protocols.

Part no. 9016E1101

#### MagPro R30, Theta Burst option

A specialized software that makes it possible for the MagPro R30 to stimulate theta burst protocols.

Part no. 9016E0361

## R20 family wifi option for reporting and protocol set-up

#### WiFi Dongle, Accces Point, Software

A Wi-Fi package containing a secure Wi-Fi connection and software for running the MagPro R20 Configurator including reporting functionality. The MagPro R20 Configurator is used to easily create protocols on your computer to upload to the MagPro R20 and subsequently print log files of performed protocols with your own logo.

Part no. 9016C0821

#### **Paired-Pulse Composer**

#### Control software for stim. w. MagOption

A software program for creating, saving, and executing randomized paired-pulse protocols for research studies. For reliability, the actual realized outcome for each pulse pair is measured by the MagPro stimulator and displayed in the Paired-Pulse Composer. Only supported by the MagPro R30+Option and MagPro X100+Option with software 7.1. or newer.

Part no. 9016S0171

#### MagPro R30, 80 pps option

A specialized software that increases the repetition rate for a MagPro R30 from 30 Hz to 80 Hz.

Part no. 9016E0381

#### MagPro R30, 80 pps and **Theta Burst option**

A specialized software version that increases the repetition rate for a MagPro R30 from 30 Hz to 80 Hz and at the same time makes it possible for the MagPro R30 to stimulate theta burst protocols.

Part no. 9016E1111

#### MagPro X100, 250 pps option

A specialized software that increases the repetition rate for a MagPro X100 or X100+MO from 100 Hz to 250 Hz.

Part no. 9016E0341



#### **MagVenture 360® Patient Data Management System**

The MagVenture 360® patient data management system is a cloud-based, GDPR compliant system for use in clinical settings, providing secure data storage. With the 360 software added to your MagVenture TMS Therapy system you have anytime, anywhere access from devices such as laptops and tablets. It reduces administration time by storing all patient data in one place.

The solution package consists of a 360 gateway unit with native application, a touch screen monitor with data from the 360 web application, access to the 360 web application (from any device) and an annual software license. Compatible with R30 or X100. One license can be used for multiple devices within the same company.

Part no. 9016S0191

#### **360 Mounting kit for Monitor**

A bracket for the 360 monitor, so it can be mounted on the side of a trolley.

Part no. 9016B0701

#### 360 Gateway unit

The MagVenture 360 gateway unit is for placement on the back of the stimulator (R30 or X100).



Part no. 9016C0901

#### **360 Monitor**

A touch screen monitor for use with the MagVenture 360 solution. Includes an arm that can be mounted on a trolley.







#### **MEP Monitor**

A one channel EMG amplifier for mounting on the back of the MagPro R/X systems (not compatible with R20 or Compact). For measurement of motor evoked potential (MEP). Especially designed for determination of motor threshold.



#### MEP Monitor (incl. 0.7 mm cable and electrodes)

Part no. 9016C0701

#### MEP Monitor (incl. 1.5 mm cable and electrodes)

Part no. 9016C0711

#### **MEP Monitor Electrode Cables**

A shielded electrode cable for MEP monitor for active, reference and ground electrodes.



#### 1.5 mm connector for MEP

Part no. 9016C0811



#### 0.7 mm connector for MEP

Part no. 9016C0851

#### Surface Electrodes - 12 pcs.



#### 1.5 mm Surface Electrodes

Used for MEP recordings as active, reference and ground electrode and used for A/P coils for current stimulation.

Part no. 9016S0201



#### 0.7 mm Surface Electrodes

Used for MEP recordings as active, reference and ground electrode

Part no 9016S0211

#### Coil Converter, MagPro Compact

An external power control for coils without controls on the coil handle. For use with the MagPro Compact, the interface unit is mounted on the front of the device between the stimulator and the coil. Can be used for all coils except C-100, C-B60, C-B70, RT-120-II and MMC-140-II. Note: MCF and Cool coils

The coil converter must always be used together with a coil interface 6p to 4p LEMO (part no. 9016E4671).

Part no. Part no. 9016B0102 9016E4671



#### Coil Interface Cable 4p to 6p LEMO

A LEMO coil interface cable for use with MagPro and MagPro R20 only. To minimize the mechanical stress on the small 4p LEMO connector on coils, when disconnecting and reconnecting the coil to the MagPro, an interface cable with the more robust 6p LEMO connector can be a solution. For connections of supported coils with 4p LEMO connector to MagPro R20.

Part no. 9016E4641



#### Foot Switch for MagPro R30/X100

A foot switch for external triggering of MagPro R30 or X100. The foot switch is connected to the trigger connector on the rear panel and generates an external trigger signal to control start and stop of stimulation sequences with a timing setup.



Part no. 9016C0791

#### **Foot Switch for MagPro R100**

A foot switch for external triggering of MagPro R100. The foot switch is connected to a COM2 serial port and generates an external trigger signal to control start and stop of stimulation sequences with a timing setup.



Part no. 9016C0831





### **External Trigger Cable (9p D-Sub)**

A cable for external triggering to/from an external device using a 9p D-sub connector (e.g. Keypoint EMG/EP system).



Part no.	Connectors	Cable length
9016E4551	9p D-sub plug (MagPro) 9p D-sub plug (Keypoint)	3 m

#### External Trigger Cable (BNC)


A cable for external triggering to/from an external device using BNC connectors.



Part no.	Connectors	Cable length
9016E4561	9p D-sub plug (MagPro)	3 m
	2 x BNC plug	

#### MagPro-MagPro Trigger Cable

A cable for external triggering from one MagPro stimulator to another, making it possible to have two magnetic coils connected and synchronized.



Part no.	Connectors	Cable length
9016E4571	9p D-sub plug (MagPro master) 9p D-sub plug (MagPro slave)	2 m

#### External Trigger Cable Splitter (9p D-Sub)

A cable splitter for external triggering of a MagPro slave device as well as an external device (e.g. Keypoint EMG/EP system).



Part no.	Connectors
9016E4581	9p D-sub plug (MagPro master) 9p D-sub plug (MagPro slave) 9p D-sub plug (Keypoint)



MagProbe is a simple tool that provides information about the magnetic field from stimulating coils. Designed to estimate the suitability of a coil for a specific application. Making it possible to predict the coil's ability to stimulate at different locations in tissue, when using different coil positions. Probe loop area is 314 mm2 as the type with BNC connector.



Part no.	Connector	Cable length	Loop wire	Loop inner diameter	Output voltage	Accuracy
9016E0311	5p DIN plug	3 m	ø2.8 mm CU.	20 mm	1V per 1kT/s.	± 10 %

#### MagProbe (BNC connector)

MagProbe is a simple tool that provides information about the magnetic field from stimulating coils. Designed to estimate the suitability of a coil for a specific application. Making it possible to predict the coil's ability to stimulate at different locations in tissue, when using different coil positions.



Part no.	Probe loop area	Cable length	Wire diam	Loop inner diameter	Output voltage	Accuracy
9016E0331	314 mm <sup>2</sup>	> 3 m	ø2.8 mm.	20 mm	1 V per 2.6 kT/s.	± 10 %

## MagProbe 3D (BNC connector)

A probe for the measurement of a coil's magnetic field in 3D.



Part no.	Connector BNC plug	Cable length	Loop wire	Loop inside diameter	Output voltage	Accuracy
9016E0351	3 pcs.	2 m	ø0.2mm CU.	ø10 – 10 windings	1 V per 1.4 kT/s	±5%

#### **Current Stimulation Cable for A/P Coils**

A spare part for current stimulation output and for electrodes with 1.5 mm connectors.



Part no.	
9016C0801	





#### 7-channel MR coil array for concurrent TMS/fMRI

A radio frequency coil for magnetic resonance investigations of the human brain in vivo. Intended for use with a type 3T MRI Scanner and in combination with MRI-B91 or MRI-B91 Air Cooled coils.

For two MR coil arrays use two TIM adapters (order at Siemens)

Part no.	Туре
9016M0021	fMRI A-type
9016M0041	fMRI B-type (for imaging only)



filter box inside the scanner room and with one filter

Intended for MRI installations where two scanners are located close to each other. The double filter ensures that crosstalk from one scanner room is not transported through the MRI coil installation to the other scanner room. The double power line filter is designed with one

box outside the scanner room to filtering signals in both directions.

Part no. 9016C0731



A power line filter for all cables entering the MRI room to support obtaining proper MRI images (without filtering MRI images may be impaired).



#### Remote Control for MRI

A remote control for operating a MagPro stimulator at a distance. The remote control can enable MagPro, activate single stimuli and set the output power from a distance. The LED indicates whether the stimulator is enabled or disabled.

Part no. 9016C0721

#### **Emergency Stop for MRI**

A emergency stop device for a patient to have with them inside the scanner. The patient can disable the MagPro stimulator at any time.



Part no. 9016C0741

# MagPro Ugrade for Emergency Stop

An emergency stop device that allows the patient or operator to disable the MagPro stimulator from a distance. For supporting connection of the emergency stop device to the front panel of the stimulator, an upgrade to the MagPro device must be ordered.

Part no. 9016C0841

#### **Leakage Current**

#### MagPro Standard Leakage Current Reduction for MRI

Minimum requirements for all MagPro stimulators to be used in MRI environment along with the MRI-B91 coils.

> Part no. 9016E1042

#### **MagPro Dynamic and Standard Leakage Current Reduction for MRI**

A filter unit added to the MagPro stimulator to eliminate/reduce artefacts during charging of the capacitor inside the stimulator, allowing MRI when recording very close to stimulation. The DC-leakage component when not charging has been reduced to below 1uA with this option.

Part no. 9016E1052

#### **MagPro XP Leakage Current Reduction for MRI**

A filter unit added to the MagPro stimulator to eliminate/reduce artefacts during charging of the capacitor inside the stimulator, allowing MRI when recording very close to stimulation. The DC-leakage component when not charging has been reduced to below 1uA with this option.

Part no. 9016E1071



## **MRI-Coil Holder (for Siemens Magnetom Trio scanner)**

A holding device used for MRI coil placement inside an MRI scanner. For easy, stable, and precise positioning of the MRI coil. 6 degrees of freedom (X, Z and 4 angular adjustments) with scales. One-grip fine tuning to ensure coil is placed perpendicular to the scalp.



Part no. 9016B0401

#### MRI-Coil Holder (for Siemens Magnetom Prisma and Skyra scanner)

A holding device used for MRI coil placement inside an MRI scanner. For easy, stable, and precise positioning of the MRI coil. 6 degrees of freedom (X, Z and 4 angular adjustments) with scales. One-grip fine tuning to ensure coil is placed perpendicular to the scalp.

Part no. 9016B0471

9016B0481

RF pick-up coil.

**Additional Front part** 

An extra coil holder for a second 7-channels

#### **EEG Noise Filter**

#### **MagPro R20 and MagPro Compact**

An upgrade to the MagPro device to optimize it for EEG measurements.


> Part no. 9016V0211

#### MagPro R30 and X100

An upgrade to the MagPro device to optimize it for EEG measurements

Part no.

9016V0201

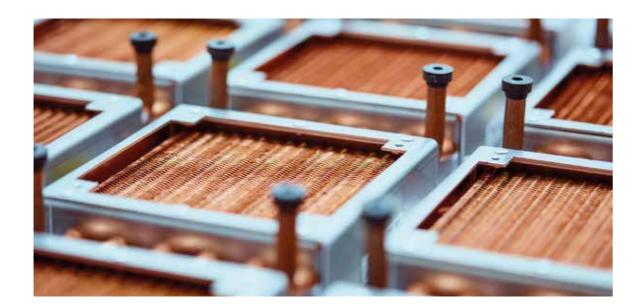

#### **TMS Sham Noise Generator**

For use in single and double blind studies, the device generates white noise or "sham noise" to hide the click sound of magnetic stimulation pulses and mask the lack of stimulation with a sham coil. This sham noise pulse will hide click noises from the coil even at 100% stimuli intensity. Two headsets are included with Sham Noise Generator (one for the patient and one for the operator - for double blind research). Each headset has a 2 m extension cables. Additional headsets and earplugs are available.



Part no.

9016C0772

#### **Additional Headset for Sham Noise**

Part no. 9016C0782

#### **Earplug for Sham Noise Headset (5 sets)**

Part no. 9016B0271

#### **Neuro 3D Vibration Tool**

A handheld vibration tool that helps relieve pain and tension through loosening the adhesions of tendons, ligaments, and fascia. The Neuro 3D vibration tool serves as an excellent add-on to functional magnetic stimulation.



Part no.

9016M0011

#### Neuro 3D Vibration Tool - Versatile Module

A versatile module with 8 vibration heads, allowing for different types of vibration: focused, broad, intense, and shallow, of connective tissue. Types of heads: chisels (two sizes), round (three sizes), pointed, and vertebra (two sizes).



Part no.

9016M0031













#### THIS IS MAGVENTURE

MagVenture is a market-leading manufacturer of non-invasive Transcranial Magnetic Stimulation (TMS) and Magnetic Peripheral Nerve Stimulation (mPNS) systems. Privately-owned and headquartered in Denmark, MagVenture has been pioneering cutting-edge magnetic stimulation solutions for more than 30 years. MagVenture's TMS and mPNS systems are used for a wide range of applications in both research and treatment in the fields of psychiatry, neurophysiology, neurology, cognitive neuroscience, and rehabilitation.

MagVenture's vision is to offer new hope to patients by transforming how mental health and physical conditions are treated.

Our mission is to pioneer safe, effective, and reliable magnetic stimulation therapies, offer innovative and versatile research solutions and work to expand access to magnetic stimulation worldwide.

MagVenture's products are available on the global market through direct sales subsidiaries in the USA, Germany, the UK, China, and Brazil, and through a global network of distributors.

Read more about us and get in contact at www.magventure.com